









North Pipe


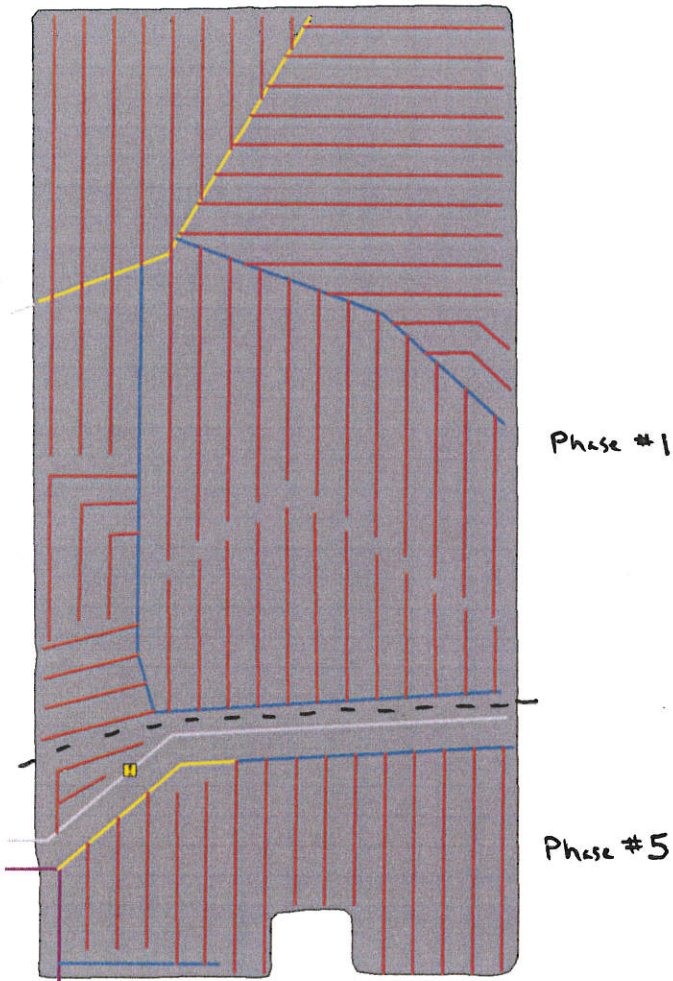


Client: Puzey
Farm: Carrington
Field: North
Name: Drainage - Planned

	4" Plastic	35974.95 ft
	6" Plastic	4362.33 ft
	8" Plastic	2085.86 ft
	12" Dual Wall	2000.00 ft
	12" Plastic	1323.30 ft
	< Unassigned >	8134.34 ft



South Pipe


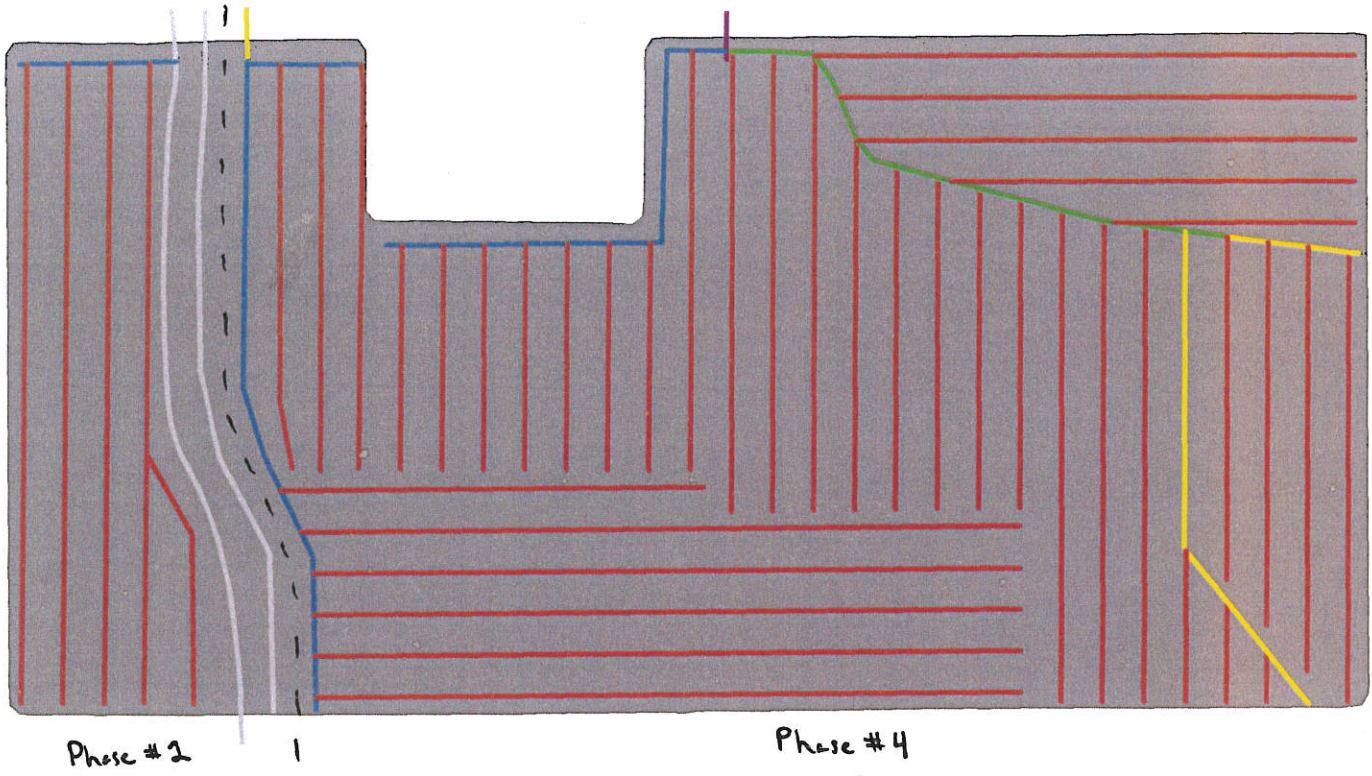


Client: Puzey
Farm: Carrington
Field: South
Name: Drainage - Planned

	4" Plastic	35855.10 ft
	6" Plastic	2807.69 ft
	8" Plastic	1254.33 ft
	10" Plastic	1100.00 ft



East 2 Pipe

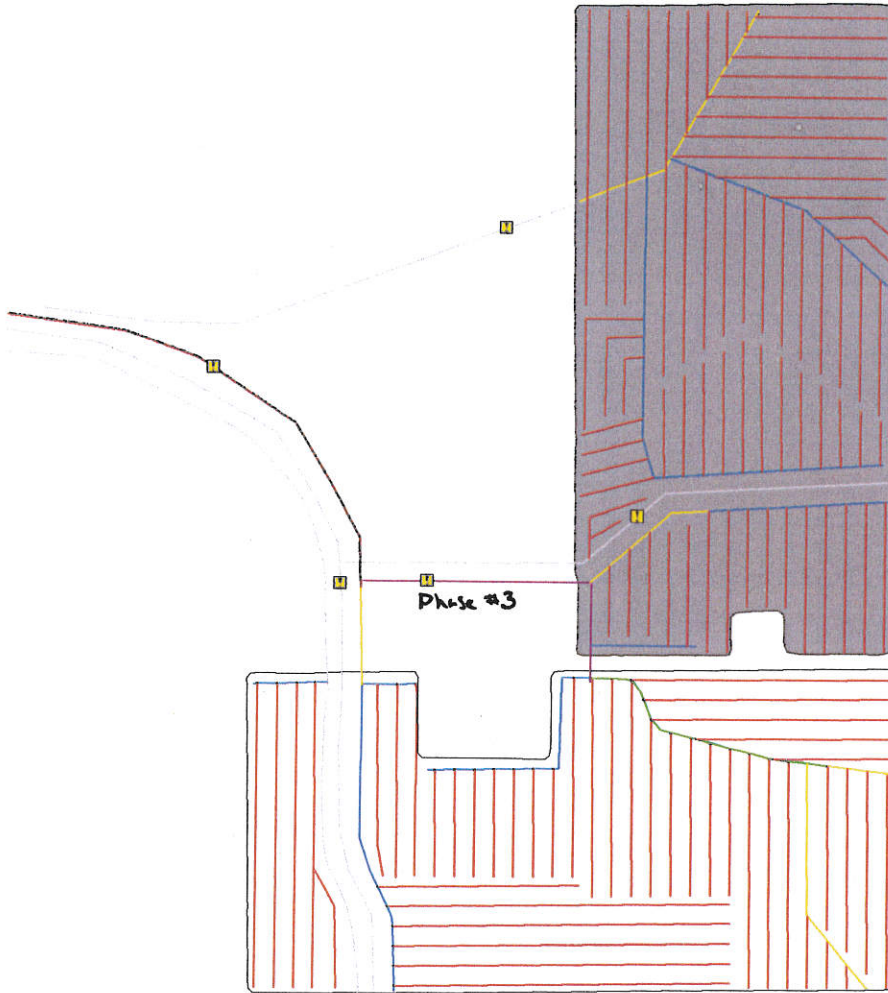

Client: Shortz
Farm: Jamaica
Field: East 2
Name: Drainage - Completed

Invoice



Page 1/1
Invoice INV0000000076
Date 11/19/2014

360 Water Solutions
300 W. Queenswood
Morton IL 61550

Bill To: Virgil Carrington
2735 Co Rd 1250 N
Homer IL 61849

Ship To: Virgil Carrington
2735 Co Rd 1250 N
Homer IL 61849

Job Number	Customer ID	Job Description	Payment Terms	Start Date	End Date	Master No.
40026	10020	JamaicaTile(Phse1&2)	Net 30	11/12/2014	11/13/2014	84
Ordered	Item Number	Description	UOM	Unit Price	Ext. Price	
33,333.16000	103001	4" Tile Installation - Plow	FOOT	\$1.00	\$33,333.16	
3,649.79000	103003	6" Tile Installation - Plow	FOOT	\$1.75	\$6,387.13	
63.00000	101105	Connection Charge	Each	\$50.00	\$3,150.00	
1.00000	101185	Tile Locate Fee	Each	\$250.00	\$250.00	

Call Mark Shortz with questions: 217-474-0689

Subtotal \$43,120.29
Misc \$0.00
Tax \$0.00
Freight \$0.00
Trade Discount \$0.00
Total \$43,120.29

PD 11-29-14

11/8/2014



360 Water Solutions, LLC.
300 W. Queenwood
Morton, IL 61550

Virgil Carrington
2735 Co Rd 1250 N
Homer, IL 61849

2014 Tilling Estimate

	Quantity	Cost	Total
Jamaica Farm - North Half of North 78 Acres (Phase #1)			
4" Tile Installation w/ Plow (80' Centers)	27984 \$	1.00	\$ 27,984.00
6" Tile Installation w/ Plow	3189 \$	1.75	\$ 5,580.75
Connection Fee	57 \$	50.00	\$ 2,850.00
Locate Existing 8" Main Installed by George Maskel	1 \$	250.00	\$ 250.00
Total Estimate			\$ 36,664.75
Total Footage			31,173.00
Total Acreage Drained			58.00
Total Cost/Acre			\$632.15



360 Water Solutions, LLC.
 300 W. Queenwood
 Morton, IL 61550

Virgil Carrington
 2735 Co Rd 1250 N
 Homer, IL 61849

11/8/2014

2014 Tiling Estimate

	Quantity	Cost	Total
Jamaica Farm - West Half of South 74 Acres (Phase #2)			
4" Tile Installation w/ Plow (80' Centers)	5439	\$ 1.00	\$ 5,439.00
6" Tile Installation w/ Plow	300	\$ 1.75	\$ 525.00
Connection Fee	6	\$ 50.00	\$ 300.00
Outlet Hookup Charge to New 21" Private Tile (Paid to Maple Lawn Land, LLC - Ed Shortz) - 12 Acres	12	\$ 450.00	\$ 5,400.00
Total Estimate			\$ 11,664.00
Total Footage			5,739.00
Total Acreage Drained			12.00
Total Cost/Acre			\$972.00



360 Water Solutions, LLC.
 300 W. Queenwood
 Morton, IL 61550

Virgil Carrington
 2735 Co Rd 1250 N
 Homer, IL 61849

11/8/2014

2014 Tiling Estimate

	Quantity	Cost	Total
Jamalca Farm - Mains for Remaining Ground (Phase #3)			
12" Dual Wall Installation w/Wheel Machine	2000	\$ 9.51	\$ 19,020.00
12" Tile Installation w/Wheel Machine	1323	\$ 6.00	\$ 7,938.00
8" Tile Installation w/Wheel Machine	392	\$ 2.95	\$ 1,156.40
Existing Tile Repair (Cross Existing Clay Main)	1	\$ 250.00	\$ 250.00
Ditch Outlet	1	\$ 500.00	\$ 500.00
Road Crossing	2	\$ 1,000.00	\$ 2,000.00
Total Estimate			\$ 30,864.40
Total Footage			3,715.00
Total Acreage Drained			0.00
Total Cost/Acre			#DIV/0!

11/8/2014



360 Water Solutions, LLC.
 300 W. Queenwood
 Morton, IL 61550

Virgil Carrington
 2735 Co Rd 1250 N
 Homer, IL 61849

2014 Tilling Estimate

	Quantity	Cost	Total
Jamalca Farm - East Half of South 74 Acres (Phase #4)			
4" Tile Installation w/ Plow (80" Centers)	30413	\$ 1.00	\$ 30,413.00
6" Tile Installation w/ Plow	2507	\$ 1.75	\$ 4,387.25
8" Tile Installation w/Plow	1254	\$ 2.75	\$ 3,448.50
10" Tile Installation w/Plow	1100	\$ 4.50	\$ 4,950.00
Connection Fee	45	\$ 50.00	\$ 2,250.00
Existing Tile Hookup Fee (Existing tile coming out of Belton and Fourrez field)	2	\$ 50.00	\$ 100.00
Some investigation needs to be done on the size of the existing tile coming into farm			
Total Estimate			\$ 45,548.75
Total Footage			35,274.00
Total Acreage Drained			61.00
Total Cost/Acre			\$746.70



360 Water Solutions, LLC.
 300 W. Queenwood
 Morton, IL 61550

Virgil Carrington
 2735 Co Rd 1250 N
 Homer, IL 61849

11/8/2014

2014 Tiling Estimate

	Quantity	Cost	Total
Jamaica Farm - South Half of North 78 Acres (Phase #5)			
4" Tile Installation w/ Plow (80' Centers)	7973	\$ 1.00	\$ 7,973.00
6" Tile Installation w/ Plow	1174	\$ 1.75	\$ 2,054.50
8" Tile Installation w/ Plow	586	\$ 2.75	\$ 1,611.50
Connection Fee	19	\$ 50.00	\$ 950.00
Total Estimate			\$ 12,589.00
Total Footage			9,733.00
Total Acreage Drained			20.00
Total Cost/Acre			\$629.45